



Introducing the TenarisHydril Blue® Heavy Wall connection | 7" TO 14"



The Blue® Heavy Wall is designed for deep well and HP/HT applications demanding heavy wall pipe with 100% pressure rated seals and enhanced performance. It has the highest compression ratings for this type of connection and has been successfully certified in accordance with ISO 13679 CAL IV. It continues to be tested under the forthcoming revision of the API RP 5C5 protocol.

The Blue® Heavy Wall connection's design is based on that of the well established Blue® connection, which has been specially adapted for use with heavy wall pipes in deep well and HP/HT applications.

The connection comes with our Dopeless® technology, which enhances its performance and reliability and provides additional operational, well productivity and HSE benefits.

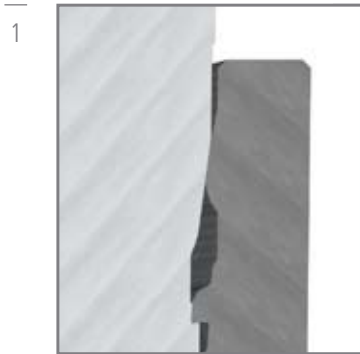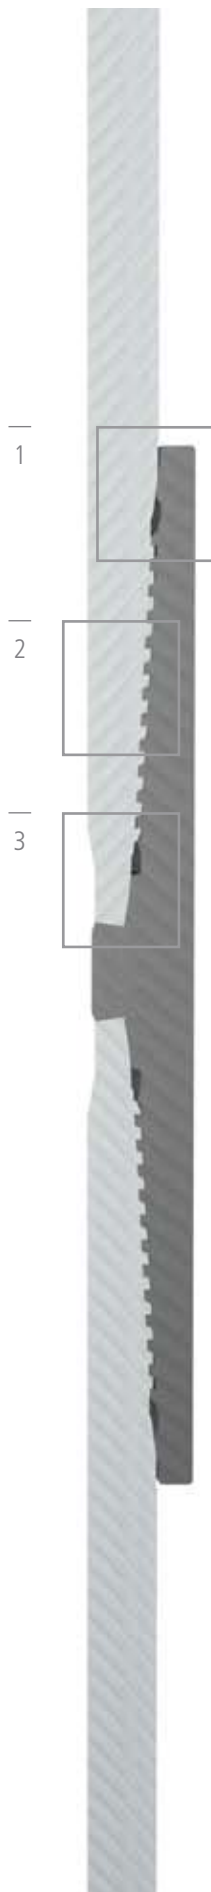

- External seal with toroidal design for a more stable performance under high combined loads.
- Dope pocket accommodates excess of thread compound for efficient and reliable make-up.



- Hooked thread that improves tension strength.
- Two thread designs featuring three and four TPI.



- Special shoulder design provides high torque and compression capacity.
- Internal seal with toroidal design for a more stable performance under high combined loads.
- Dope pocket accommodates excess of thread compound for efficient and reliable make-up.

MAIN FEATURES

- Sphere-to-cone seal geometry provides a stable sealing performance under high combined loads.
- 100% pipe body performance in terms of internal and external pressure.
- 80% tension and compression ratings (highest compression rating in the market for the segment).
- Successfully certified in accordance with ISO 13679 CAL IV and continues to be tested under the forthcoming revision of the API RP 5C5 protocol.

MAIN APPLICATIONS

- **Deep wells**
- **HP/HT**
- Intermediate casing
- Production casing
- Tie Backs

For further information please contact
premiumconnections@tenaris.com